


### Features

- Assembled in USA
- 0-30 second field replaceable electronic retard
- Two SPDT (Form C) switch contacts
- Weatherproof
- Easy to read wire terminal designations
- Easy to read retard time delay adjustment knob

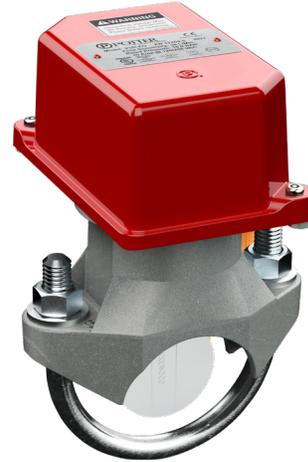

### CAUTION

Waterflow switches that are monitoring wet pipe sprinkler systems shall not be used as the sole initiating device to discharge AFFF, deluge, or chemical suppression systems. Waterflow switches used for this application may result in unintended discharges caused by surges, trapped air, or short retard times.

**Important:** This document contains important information on the installation and operation of the VSR waterflow switches. Please read all instructions carefully before beginning installation. A copy of this document is required by NFPA 72 to be maintained on site.

### Description

The model VSR-AT (EU) is an electronic vane type waterflow switch for use on wet sprinkler systems. It is UL Listed for use on steel pipe schedules 5 through 40 sizes 50mm to 150mm (2"-6"), UL Listed and FM Approved for use on steel pipe; schedule 10 through 40, sizes 50mm thru 200mm (2"-8") and BS1387 light through heavy. See ordering Information chart.

The VSR-AT (EU) may also be used as a sectional waterflow detector on large systems. The VSR-AT (EU) has two sets of alarm contacts and an adjustable instantly recycling electronic retard. The alarm contacts are actuated when a flow of 38 LPM (10 GPM) or more occurs downstream of the device. The flow condition must exist for a period of time necessary to overcome the selected retard time.

The VSR-AT (EU) may be remotely tested without flowing water by using the optional Auto Test Control model ATC-1 or ATC-4 or the use of addressable relays and monitor modules as part of a listed addressable fire alarm panel.

When the auto test feature is initiated, the VSR-AT (EU) performs a self test to ensure compliance with UL requirements regarding waterflow detection and retard time. In addition, the auto test feature ensures the integrity of the paddle/trip stem assembly. A successful completion of the auto test will activate both sets of normally open contacts on the flow switch. If the auto test detects a problem with the trip stem/paddle assembly or if there is no water in the pipe, neither normally open contact will operate and the flow switch will indicate a trouble condition at the test switch and transmit a trouble signal to the fire alarm panel.

### Enclosure

The VSR-AT (EU) switches and retard device are enclosed in a general purpose, die-cast base and a weather/UV/flame resistant high impact composite cover. The cover is held in place with two tamper resistant screws which require a special key for removal.

### Technical Specifications

Service Pressure	31 BAR (450 PSI) - UL	
Flow Required for Alarm	38 LPM (10 GPM) - UL	
Maximum Surge	5.5 m/s (18 FPS)	
Contact Ratings	Two sets of SPDT (Form C) 10.0 Amps at 125/250VAC 2.0 Amps at 30VDC Resistive 10 mAmps min. at 24VDC	
Conduit Entrances	Two knockouts provided for 1/2" conduit	
Power Requirements	24 VDC from listed or approved source with battery backup	
Enclosure Cover	Weather/UV/Flame Resistant High Impact	
Base	Die-cast aluminum	
Conduit Entrances	Two knockouts provided for 1/2" conduit.	
Environmental Specifications	NEMA 4/IP54 Rated Enclosure suitable for indoor or outdoor use with factory installed gasket when used with appropriate conduit fitting. Non-corrosive sleeve factory installed in saddle.	
Service Use	Automatic Sprinkler One or two family dwelling Residential occupancy up to four stories National Fire Alarm Code	NFPA-13 NFPA-13D NFPA-13R NFPA-72

### WARNING

- Installation must be performed by qualified personnel and in accordance with all national and local codes and ordinances.
- Shock hazard. Disconnect power source before servicing. Serious injury or death could result.
- Risk of explosion. Not for use in hazardous locations. Serious injury or death could result.

### Installation

These devices may be mounted on horizontal or vertical pipe. On horizontal pipe they shall be installed on the top side of the pipe where they will be accessible. The device should not be installed within 15 cm (6") of a fitting which changes the direction of the waterflow or within 60 cm (24") of a valve or drain.

**NOTE:** Do not leave cover off for an extended period of time.


Drain the system and drill a hole in the pipe using a hole saw in a slow speed drill (see Fig. 1). Clean the inside pipe of all growth or other material for a distance equal to the pipe diameter on either side of the hole. Roll the vane so that it may be inserted into the hole; do not bend or crease it. Insert the vane so that the arrow on the saddle points in the direction of the waterflow. Take care not to damage the non-corrosive bushing in the saddle. The bushing should fit inside the hole in the pipe. Install the saddle strap and tighten nuts alternately to required torque (see the chart in Fig. 1). The vane must not rub the inside of the pipe or bind in any way.

### WARNING

Do not trim the paddle. Failure to follow these instructions may prevent the device from operating and will void the warranty. Do not obstruct or otherwise prevent the trip stem of the flow switch from moving when water flows as this could damage the flow switch and prevent an alarm. If an alarm is not desired, a qualified technician should disable the alarm system.

Fig 1

DO NOT LEAVE COVER OFF FOR AN EXTENDED PERIOD OF TIME

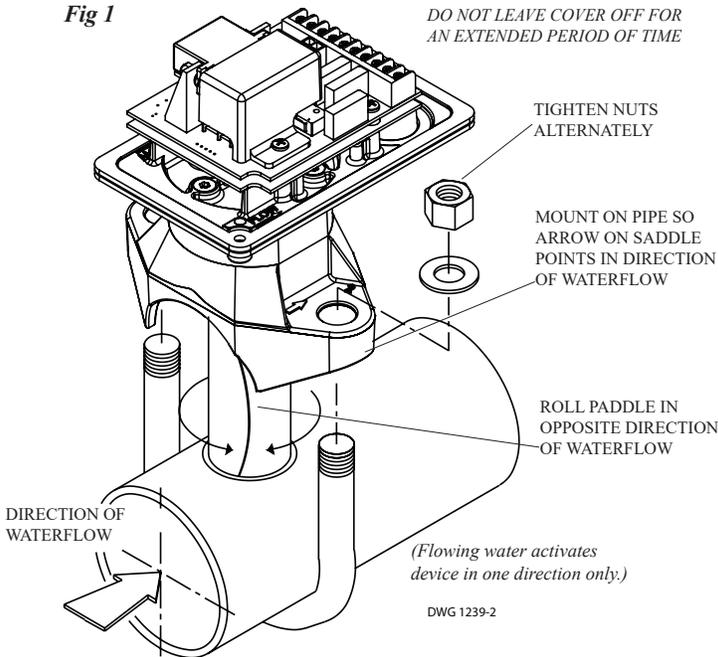



DWG 1239-2

### Retard Adjustment

The delay can be adjusted by turning switch S1 (see Fig. 6) to the desired time delay (0=no delay and 1=10 second delay 2=20 second delay 3-9=30 second delay). Factory setting is set at 3=30 second delay. The time delay should be set at the minimum required to prevent false alarms.

### CAUTION

Hole must be drilled perpendicular to the pipe and vertically centered. Refer to the Compatible Pipe/Installation Requirements chart for size.




### Compatible Pipe/ Installation Requirements

Model	Nominal Pipe Size		Nominal Pipe O.D.		Pipe Wall Thickness										Hole Size		U-Bolt Nuts Torque	
	mm	inch	mm	inch	Lightwall		Schedule 10 (UL)		Schedule 40 (UL)		BS-1387 (LPC)		DN (VDS)		mm	inch	n-m	ft-lb
VSR-EU 2	DN50	2	60.3	2.375	1.651	.065	2.77	0.109	3.91	0.154	3.6	0.142	2.3	0.091	33.0 ± 2.0	1.25 + .125/-0.062	27	20
VSR-EU 2 1/2	-	2.5	73.0	2.875	2.134	.084	3.05	0.120	5.16	0.203	-	-	-	-				
VSR-EU 2 1/2	DN65	-	76.1	3.000	-	-	-	-	-	-	3.6	0.142	2.6	0.102				
VSR-EU 3	DN80	3	88.9	3.500	2.108	.083	3.05	0.120	5.49	0.216	4.0	0.157	2.9	0.157	50.8 ± 2.0	2.00 ± .125		
VSR-EU 4	DN100	4	114.3	4.500	-	-	3.05	0.120	6.02	0.237	4.5	0.177	3.2	0.177				
VSR-EU 5	-	5	141.3	5.563	2.134	.084	3.40	.0134	6.55	0.258	-	-	-	-				
VSR-EU 5	DN125	-	139.7	5.500	-	-	-	-	-	-	5.0	0.197	3.6	0.142				
VSR-EU 6	DN150	6	168.3	6.625	2.921	.115	3.40	0.134	7.11	0.280	5.0	0.197	4.0	0.157				
VSR-EU 8	DN200	8	219.1	8.625	-	-	3.76	0.134	8.18	0.322	6.3	.248	4.5	0.177				

## Knockout Removal

To remove knockouts: Place screwdriver at inside edge of knockouts, not in the center.

Fig 2




## NOTICE

Do not drill into the base as this creates metal shavings which can create electrical hazards and damage the device. Drilling voids the warranty.

## Switch Terminal Connections Clamping Plate Terminal

Fig 3



## WARNING

An uninsulated section of a single conductor should not be looped around the terminal and serve as two separate connections. The wire must be severed, thereby providing supervision of the connection in the event that the wire become dislodged from under the terminal. Failure to sever the wire may render the device inoperable risking severe property damage and loss of life.

Do not strip wire beyond 3/8" of length or expose an uninsulated conductor beyond the edge of the terminal block. When using stranded wire, capture all strands under the clamping plate.

## Testing

The frequency of inspection and testing for the Model VSR-AT (EU) and its associated protective monitoring system shall be in accordance with applicable NFPA Codes and Standards and/or the authority having jurisdiction (manufacturer recommends quarterly or more frequently).

An inspector's test valve shall be provided for commissioning and test purposes when required by the AHJ. If there are no provisions for testing the operation of the flow detection device on the system, application of the VSR-AT (EU) is not recommended or advisable.

A minimum flow of 38 LPM (10 GPM) is required to activate this device.

## NOTICE

Advise the person responsible for testing of the fire protection system that this system must be tested in accordance with the testing instructions.

## Maintenance

Inspect detectors monthly. If leaks are found, replace the detector. The VSR-AT (EU) waterflow switch should provide years of trouble-free service.

## Mounting Dimensions

Fig 4


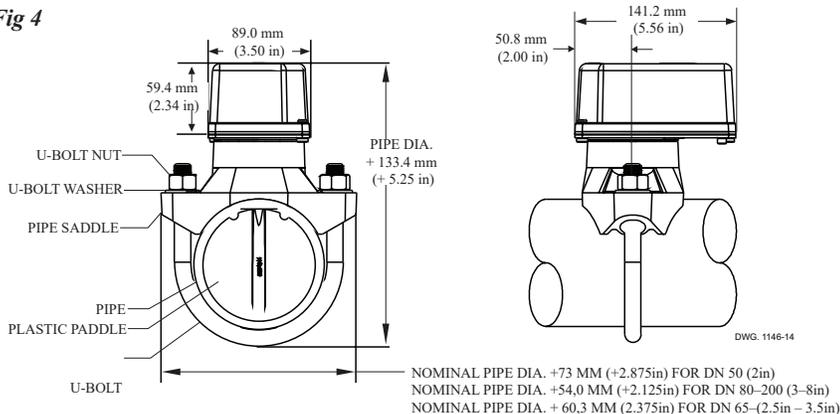


Fig 5

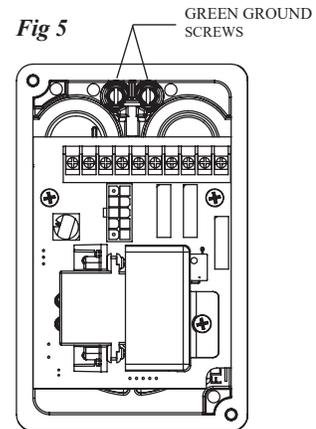


## Removal of Waterflow Switch

- To prevent accidental water damage, all control valves should be shut tight and the system completely drained before waterflow detectors are removed or replaced.
- Turn off electrical power to the detector, then disconnect wiring.
- Loosen nuts and remove U-bolts.
- Gently lift the saddle far enough to get your fingers under it. With your fingers, roll the vane so it will fit through the hole while continuing to lift the waterflow detector saddle.
- Lift detector clear of pipe.

## Typical Electrical Connections

Fig 6

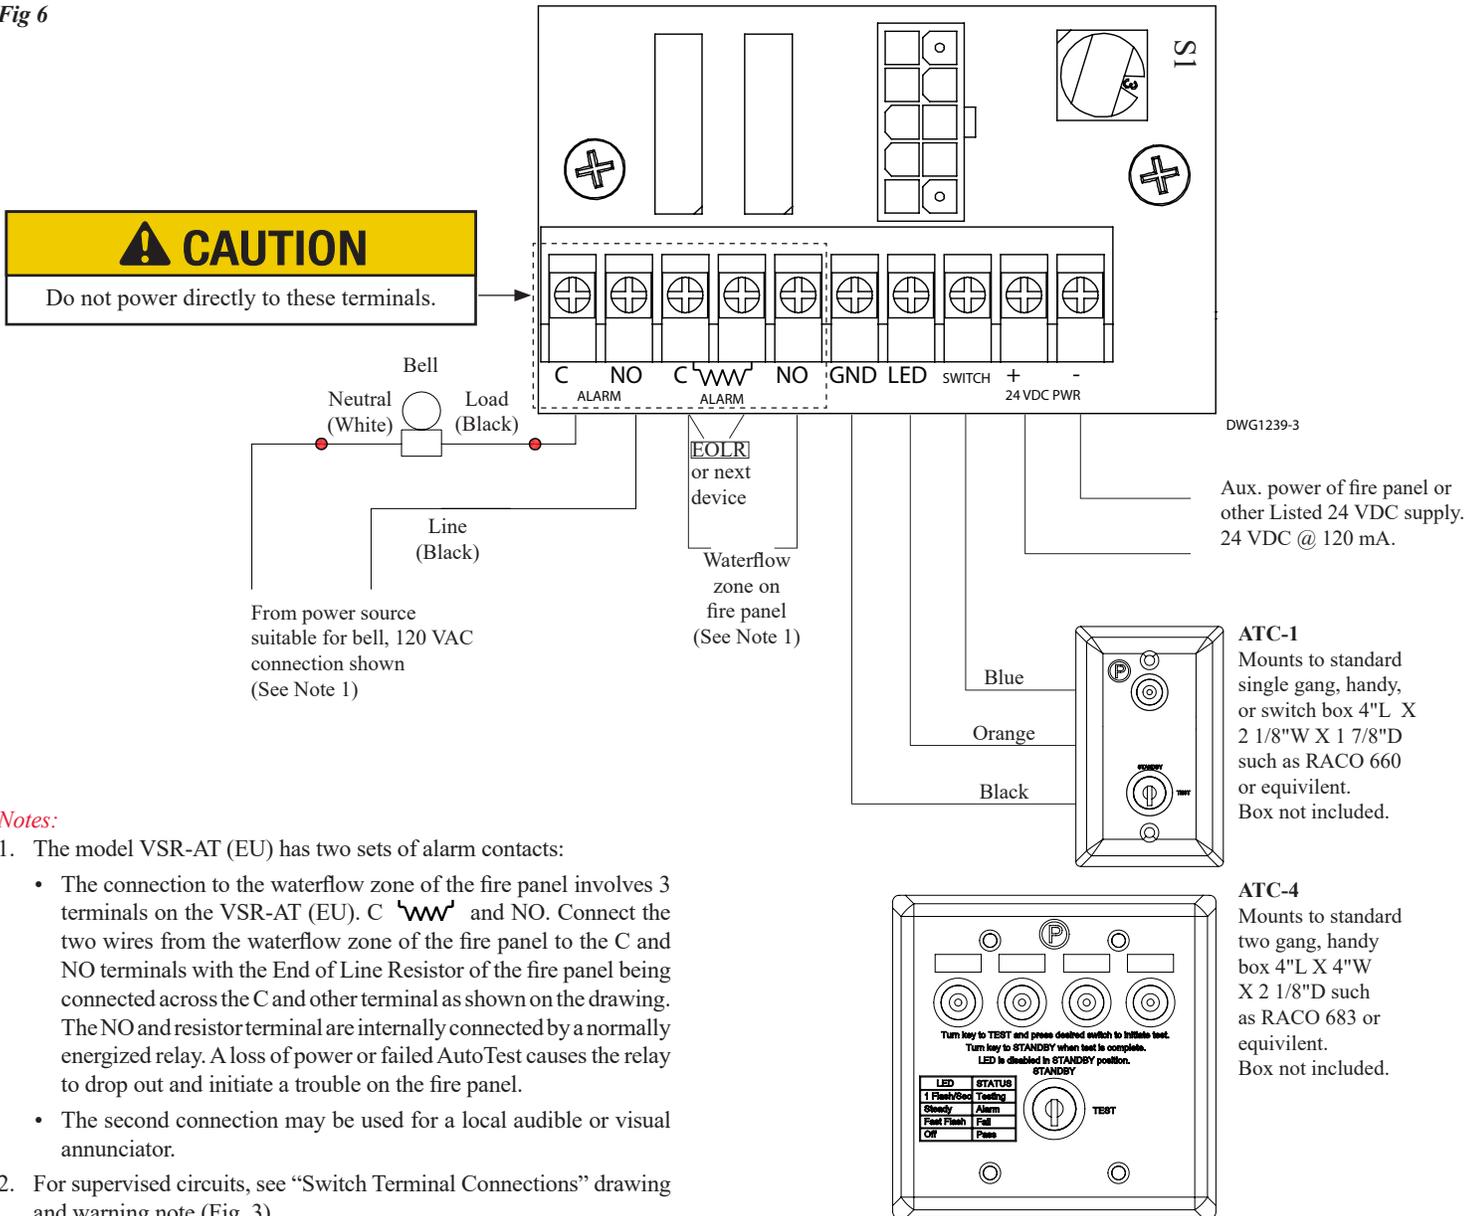


The ATC consists of a momentary push button switch, a key switch to enable/disable the push button and an LED. Turning the keyswitch to Test will enable the push button switch. Momentarily pressing the push button switch will initiate the Auto Test feature. The LED will flash once per second during the test while the retard time is being tested. After the retard time expires, the VSR-AT (EU) is put through a simulated waterflow test. If the test was successful, the LED will light for a few seconds and both sets of switch contacts on the VSR-AT (EU) will activate for a few seconds sending a waterflow signal to the fire alarm panel. After the LED goes out, the key switch can be

returned to Standby and the fire alarm panel reset. If the test was unsuccessful, the LED will flash 4 times per second, the switch contacts of the VSR-AT (EU) will not activate and the VSR-AT (EU) will initiate a trouble on the fire alarm panel by opening the circuit between the NO terminal and the End Of Line Resistor terminal.

## Typical Electrical Connections for Operation by Addressable Fire Alarm Panel

Fig 7

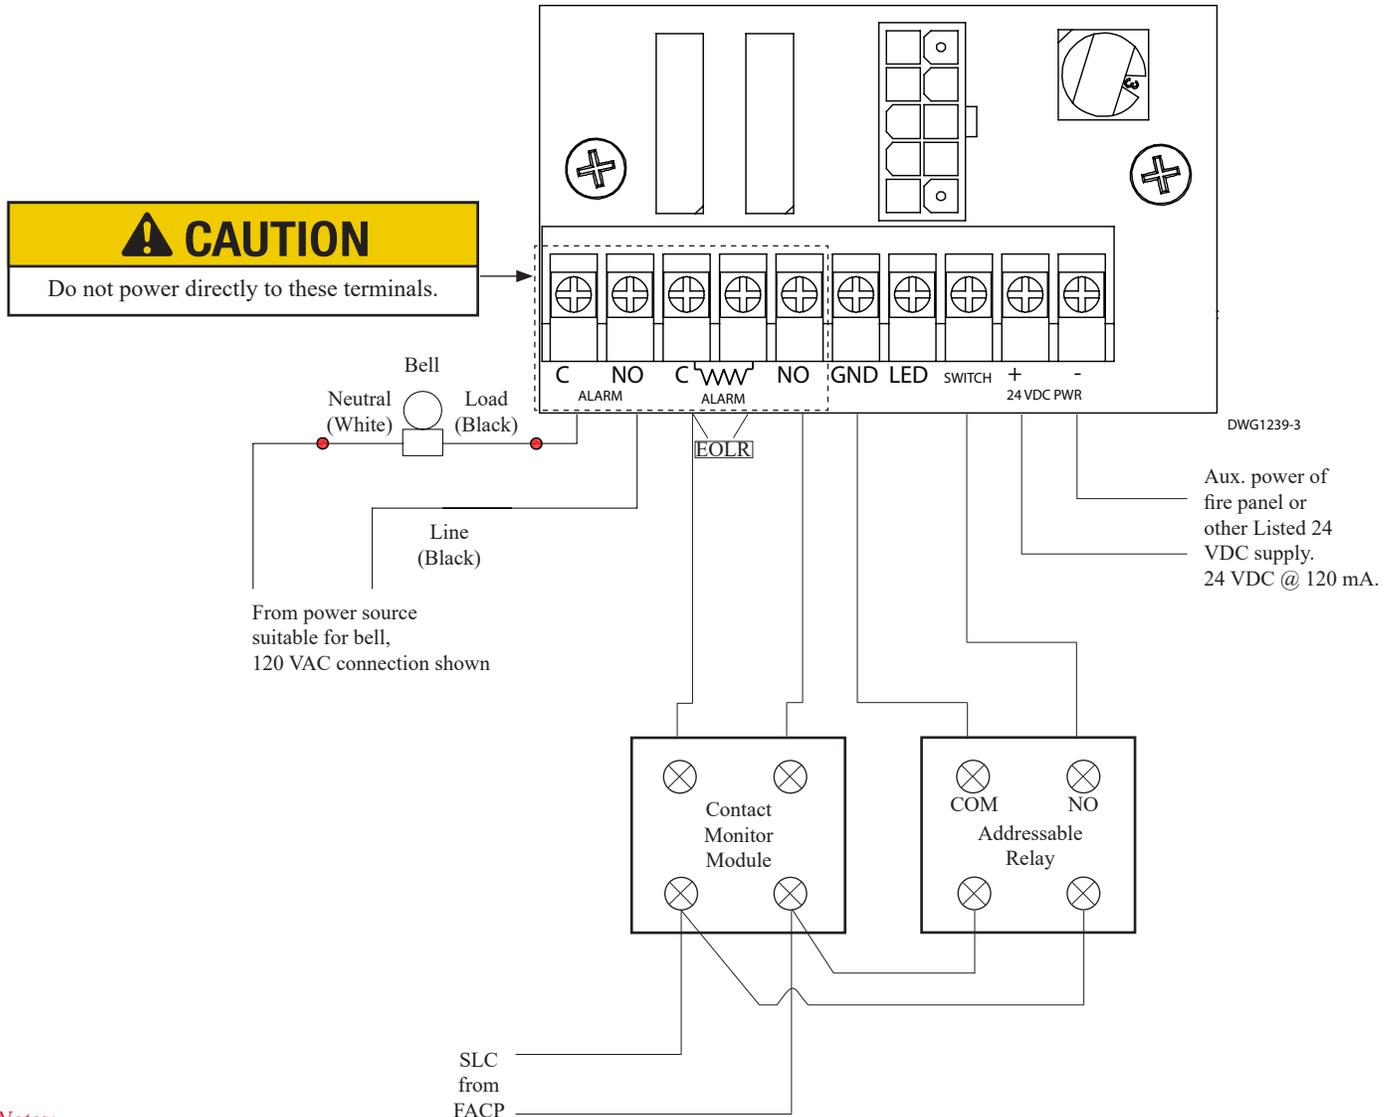

**Notes:**

- The model VSR-AT (EU) has two sets of alarm contacts:
  - The connection to the waterflow zone of the fire panel involves 3 terminals on the VSR-AT (EU). C, W, and NO. Connect the two wires from the waterflow zone of the fire panel to the C and NO terminals with the End of Line Resistor of the fire panel being connected across the C and other terminal as shown on the drawing. The NO and resistor terminal are internally connected by a normally energized relay. A loss of power or failed Auto Test causes the relay to drop out and initiate a trouble on the fire panel.
  - The second connection may be used for a local audible or visual annunciator.
- For supervised circuits, see "Switch Terminal Connections" drawing and warning note (Fig. 3).

The Auto Test feature can be initiated by momentarily connecting the GND and Switch terminals together using the Auto Test Control (ATC) or any UL Listed switch or relay.

Activating the relay will initiate the Auto Test feature. After the retard time expires, the VSR-AT is put through a simulated waterflow test. If the test was successful, both sets of switch contacts on the VSR-AT will activate for a few seconds sending a waterflow signal to the fire alarm panel. If the test was unsuccessful, the switch contacts of the VSR-AT will not activate and the VSR-AT will initiate a trouble on the fire alarm panel by opening the circuit between the NO terminal and the End Of Line Resistor terminal.


## Troubleshooting Guide

A successful completion of the Auto Test will momentarily activate both sets of normally open contacts on the flowswitch for approximately 7 seconds. If the Auto Test detects a problem with the trip stem/paddle assembly, or if there is no water in the pipe, neither normally open contact will operate. The flowswitch will then indicate a trouble condition at the ATC test switch and transmit a trouble signal to the fire alarm control panel.

### When Fire Panel Stays in Trouble:

- Check the wiring
- The zone of the fire panel should be wired to the VSR-AT (EU) as shown on pg. 5 of bulletin 5401578. The End of Line Resistor should be installed as shown across the terminals marked C and the terminal to the right of C which is indicated by the other end of the resistor symbol. The zone of the fire panel connects to the terminals marked C and N.O.
- The NO and End of Line Resistor terminals are connected internally by a normally energized relay. A loss of power or failed AutoTest causes the relay to drop out and initiates a trouble at the fire panel.
- The only way to clear the trouble on the fire panel is to conduct a successful AutoTest using the ATC test switch or other test method. Conducting an actual waterflow test will put the panel in alarm but will not clear the trouble.

Fig. 8

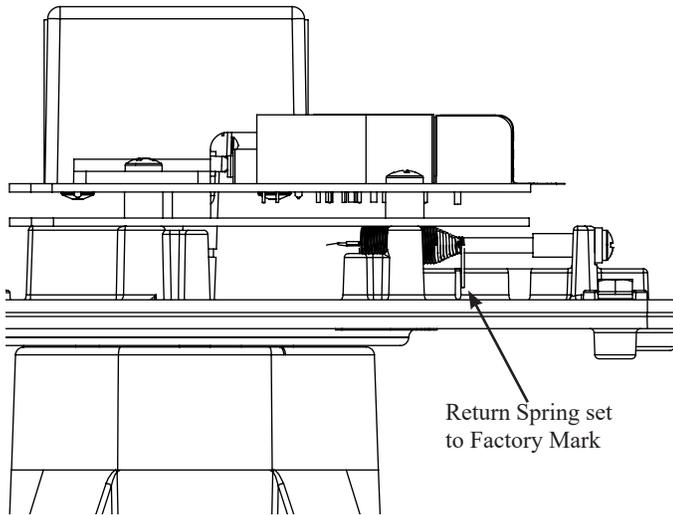

### When VSR-AT Fails Auto Test:

- Is there water in the pipe? The VSR-ST (EU) will fail the AutoTest if the pipe it is installed on is not full of water.
- Has the return spring on the VSR-AT (EU) been adjusted? This spring has been factory set and should not be adjusted in the field. Refer to Figure 8 to determine the factory spring setting. If the spring is not at the factory setting, turn the spring adjustment screw until the factory spring setting is restored.
- For other issues contact Potter Tech Support at 866-956-1211 or visit our web site at <http://www.pottersignal.com/> run your mouse over the FIRE SPRINKELR MONITORING header and select Tools and Resources. Click on presentations to select the VSR-AT (EU) Tech brief or troubleshooting video

## Ordering Information

Nominal Pipe Size	Model	Part #	Replacement PCB #	
DN50	2"	VSR-AT-2 (EU)	1116202	1029094
DN65	2 1/2"	VSR-AT-2 1/2 (EU)	1116225	1029095
DN80	3"	VSR-AT-3 (EU)	1116203	1029096
-	3 1/2"	VSR-AT-3 1/2	1116135	1029077
DN100	4"	VSR-AT-4 (EU)	1116204	1029098
-	5"	VSR-AT-5 (EU)	1116205	1029099
DN150	6"	VSR-AT-6 (EU)	1116206	1029100
DN200	8"	VSR-AT-8 (EU)	1116208	1029100

Optional Power Supply		
Model	Description	Part Number
-	Power Supply	3006479
BT-80	12V Battery-8AH (2 REQUIRED)	5130084

Optional Test Switch		
Model	Description	Part Number
ATC-1	Single Zone Test Control	1000221
ATC-4	Four Zone Test Control	1000224
SGB-R	Single Gang Box-Red	1000483
DGB-R	Double Gang Box-Red	1000484