

AMS-37 SERIES INDUSTRIAL MAGNETIC CONTACT




- UL and ULC Listed
- Rugged design for industrial use
- 2" operating gap
- Alnico 5 magnet
- Available in gray or brown

Application


The AMS-37 Series Industrial Magnetic Contact is a UL Listed magnetic contact built for rugged environments and practically any opening. It is designed to provide clean and quick installations. The AMS-37 Series can be used to protect openings such as: man doors, overhead doors, roof hatches, or hinged skylights.

Dimensions

AMS-37

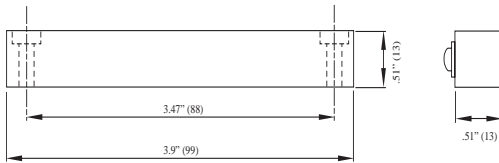

AMS-37L

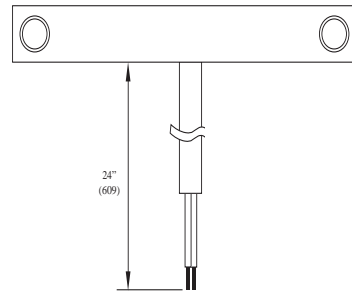

Specifications

Model Number	Color	Stock Number	Contact	Contact Rating	Contact Type	Max. Carry Current	Max. Switching Current	Breakdown Voltage	Operating Gap	Mounting Method	Operating Temperature Range
AMS-37	Gray	4350170	Terminal	10VA	Form A N.O.	2.0A	0.5A	250VDC min.	2" min.	Screws	32°F to 120°F (0°C to 49°C)
	Brown	4350168			Form C N.O./N.C.						
AMS-37B	Gray	4350234									
	Brown	4350169									
AMS-37L	Gray	4350172	24" leads								
	Brown	4350060	Form A N.O.								
AMS-37L48	Gray	4350174	48" leads								