

## **SASH SERIES**

## SPRINKLER ALARM STROBE HORN/SIGN COMBINATION



**UL Listed Strobe Horn** 

**Dimensions:** 9-1/4" h x 10" w x 4" d

Voltages Available: SASH-24 (24VDC)

SASH-120 (120VAC)

**Environment:** Indoor or Outdoor use

Weatherproof backbox is included with

both models


Termination: Separate terminals for horn and strobe

**Finish:** Red with white lettering SASH-24 Stock No. 1000555 SASH-120 Stock No. 1000560

The SASH series is a multitone horn/strobe combination designed for use as an audio visual indication for automatic sprinkler systems. It can be installed in conjunction with or in place of water motor gongs.

Strobe Intensity, dBA, and Current Ratings						
Model	SASH-24 Input Current		SASH-120 Input Current		Typical Anechoic dBA at 10 ft.	
Tone	Amps at 24V DC		Amps at 115V AC		At Nominal Input Voltage	
	HI	STD	HI	STD	HI	STD
Horn	0.038	0.024	0.050	0.040	99	93
Bell	0.019	0.012	0.040	0.038	92	87
March Time Horn	0.038	0.024	0.050	0.040	99	93
Code-3 Horn	0.038	0.024	0.050	0.040	99	93
Code-3 Tone	0.027	0.016	0.042	0.038	95	90
Slow Whoop	0.047	0.025	0.050	0.040	99	94
Siren	0.034	0.022	0.045	0.040	98	93
Hi/Lo	0.020	0.013	0.041	0.039	93	88
Strobe Candella	75		15			
Strobe Current (If the strobe and audible operate on the same circuit, add the strobe current to the tone current.)	0.102		0.060			

## Wiring Information

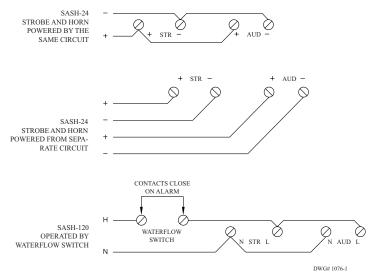

Potter Electric Signal Company, LLC • 2081 Craig Road, St. Louis, MO, 63146-4161 • Phone: 800-325-3936/Canada 888-882-1833 • www.pottersignal.com