




AMS-10 SERIES MINI SURFACE MOUNT CONTACT

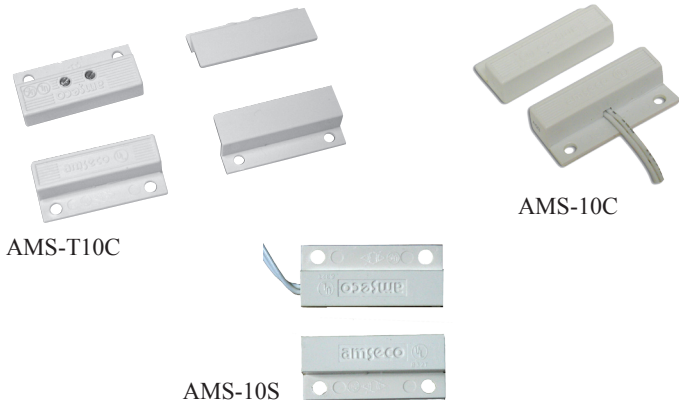


- UL and ULC Listed
- Slim design for tight spaces
- 3/4" operating gap
- Alnico 5 magnet
- Available in white, brown, gray, or ivory
- Screw or 3M adhesive

Application

The AMS-10 Series Mini Surface Mount Contact is a UL Listed slim contact designed for tight spaces to accommodate hard to reach locations. The AMS-10 Series is available with side mount leads, center mount leads, or with terminals only. This provides options for fitting multiple applications. These devices can be used to protect openings such as: man doors, sliding doors, windows, or any other opening that requires a small contact.

Dimensions

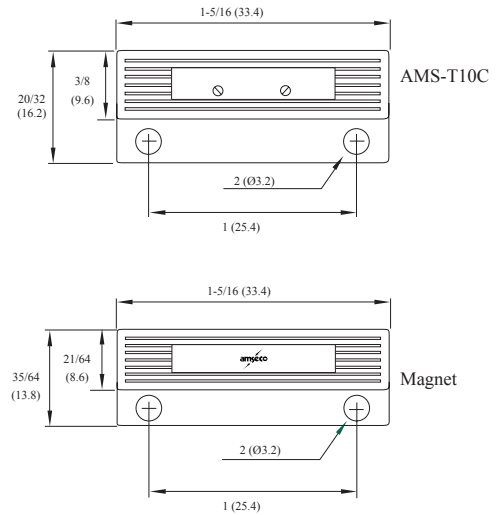

Specifications

| Model | Color | Stock Number | Contact | Contact Rating | Contact Type | Max. Carry Current | Max. Switching Current | Breakdown Voltage | Operating Gap | Mounting Method | Operating Temperature Range |
|----------|-------|--------------|-----------------|----------------|--------------|--------------------|------------------------|-------------------|---------------|---------------------------|-----------------------------|
| AMS-10C | White | 4350108 | 25" Center Lead | 10VA | Form A N.O. | 1.0 Amp | .3 Amp | 200VDC min. | 3/4" | Screw in or self-adhesive | 32°F to 120°F (0°C to 49°C) |
| | Brown | 4350098 | | | | | | | | | |
| | Gray | 4350100 | | | | | | | | | |
| | Ivory | 4350102 | | | | | | | | | |
| AMS-10S | White | 4350109 | 25" Side Lead | | | | | | | | |
| | Brown | 4350099 | | | | | | | | | |
| | Gray | 4350101 | | | | | | | | | |
| | Ivory | 4350104 | | | | | | | | | |
| AMS-T10C | White | 4350107 | Terminal | | | | | | | | |
| | Brown | 4350106 | | | | | | | | | |