



## Fireray® 2000 EExd

### Explosion Proof Optical Beam Smoke Detector

The Fireray® 2000 EExd system is ideally suited to protect large areas with potentially explosive atmospheres, protection against smoking fires can be provided by this beam. Fireray® 2000 EExd includes an infrared transmitter and a receiver, both of which are ATEX-certified for use in Group 2 hazardous areas. There is a separate, safe area, wall-mounted remote low level control unit to allow adjustment and testing from a convenient non-hazardous location.


The product is designed for large enclosures with oil rigs, refineries, ordnance stores, waste water treatment plants, and similar premises. It provides an early warning of smoldering smoke generated fires, some of which may not be picked up by flame detectors installed in many hazardous areas. For installations complying with UL268/NFPA72, the maximum distance of Detector and Reflector from the ceiling must be 10% of the distance between floor and ceiling.

#### Smoke Detection

If smoke is present in the beam's path, the received signal is reduced by a level determined by the density of the smoke. If the smoke reduces the signal strength to between the obscuration threshold and 93% for approximately 10 seconds, the fire alarm relay is activated. The alarm threshold may be set to 25%, 35% or 50% to suit the installation.

#### Engineering Specification

The projected beam type smoke detector shall be a 4-wire 12/24 VDC device to be used with a separately supplied 4-wire control panel. The unit shall consist of an integrated transmitter and receiver. The detector shall operate between the range of 33ft to 330ft (10m to 100m). The temperature range of the beam shall be -4°F to +131°F (-20°C to +55°C). The beam detector shall feature automatic gain control which will compensate for gradual signal deterioration from dirt accumulation on the lens. The beam detector shall be ATEX Certified, comply with EN54:12 and meet EExd IIB T6 temperature range requirements. The unit shall include one wall mount alignment bracket. Testing shall be carried out by using a calibration test filter. The projected beam smoke detector shall be a FFE Ltd. Fireray® 2000 EExd.

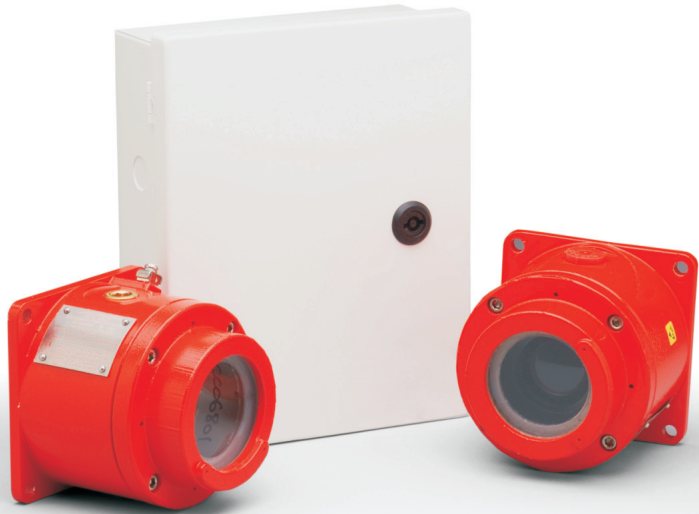

#### Features

- Separate explosion-proof Transmitter and Receiver units
- Signal Strength indicating LED's
- Range 33ft. to 330ft. (10m to 100m)
- Easy set up and alignment
- Internal test switch
- Complies with ATEX and EN54:12
- 3 selectable fire alarm thresholds: 25%, 35% or 50%
- Alarm latching or auto reset
- Automatic Gain Control (AGC)
- 12 VDC or 24 VDC operation
- Separate alarm and trouble relay contacts
- Ground Level Control unit
- Adjustment using wall bracket
- Built-in 1/2"/M-20 conduit knock-outs on controller. M-10 threaded on TX/RX.



Fireray® 2000 EExd  
Optional Wall  
Mounting Bracket

## Construction Specification

Housing:	Controller - Double pressed sheet steel Transmitter/Receiver - Marine grade aluminum alloy
IP Rating:	Controller IP50, Transmitter/Receiver IP66
Finish:	Controller - White RAL9010 Transmitter/Receiver - Red RAL 2002
Weight:	Controller - 2.4 lbs. (1.1 kg) Transmitter/Receiver (including mounting brackets) - 8.8 lbs. (4 kg.)
Dimensions:	Controller - 8.5" W x 10.3" H x 3.5" D (210mm W x 260mm H x 88mm D) Transmitter/Receiver (excluding mounting brackets) - 4.8" W x 4.8" H x 4.8" D (124mm W x 124mm H x 121mm D)
Knock Outs:	Controller - 7x1/2"/M-20 TX/RX - M-10 Threaded

## Electrical Specification

Primary Input Power:	11.5 to 28 VDC
Protection:	100ma Fuse in Control unit
Standby Current:	8mA @ 24VDC
Alarm Current:	16.5mA @ 24 VDC
Relay Contacts:	2A at 30 VDC, resistive
Reset Time:	5 Seconds maximum
Start Up Time:	45 Seconds (Automatic)
Optical Wavelength:	880nm
Sensitivity:	25%, 35%, 50%
Fire Alarm Thresholds:	1.25dB (25%), 1.87dB (35%), 3dB (50%)
Temperature Rating:	-4°F to +131°F (-20°C to +55°C)
Relative Humidity:	0% to 93% RH non-condensing
Operational Range:	33 ft. - 330 ft. (10m - 100m)
Field wiring size:	18-14 AWG



## Listings & Approvals

- ATEX Directive 94/9/EC
- EN54: I2 & CPD ref 0786-CPD-20196
- Maryland - 2243



II 2 G D IP6X EEx d IIB T6 (Tamb = -20°C to +55°C)

## Dimensions

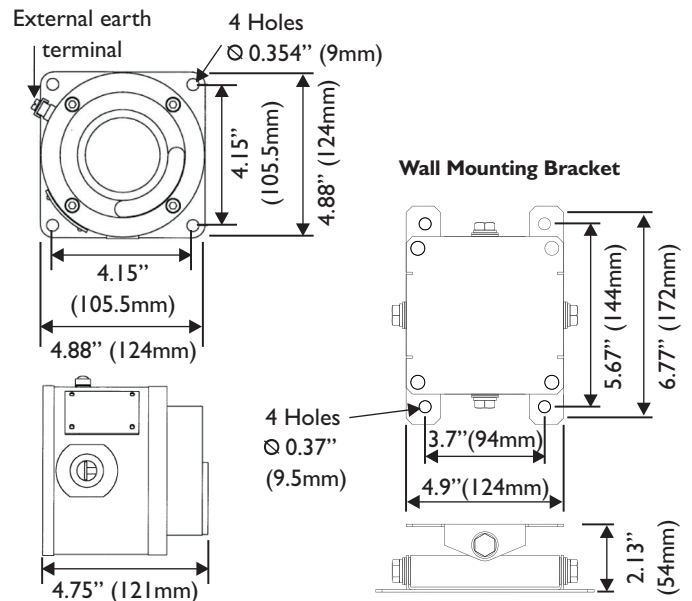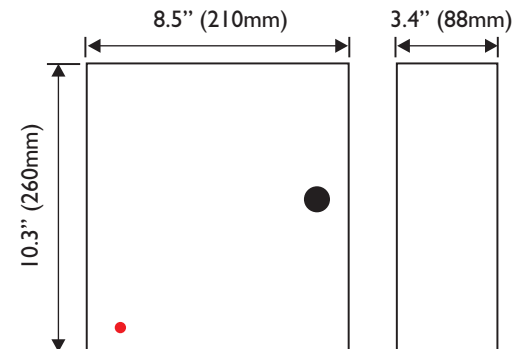

## Ordering Information

- F2000 EExd Projected beam smoke detector, 33ft. to 330ft. (10m to 100m)  
Includes I-Transmitter, I-Receiver, Control Box,  
I-Obscuration filter, I-23835 Alignment Bracket. (24006-01)
- 23835 Additional Surface Mount Alignment Bracket for ATEX Heads.  
Pivots horizontally and vertically for accurate alignment.
- 0209 Replacement Obscuration Filter

Specifications and wiring information are provided for information only and are believed to be accurate. FFE Ltd assumes no responsibility for their use. Data and design are subject to change without notice. Installation and wiring instructions are shipped with the products and should always be used for actual installation. For more information, contact your Sales Representative.

Document Part No: 24-0015-04



FFE Ltd  
1455 Jamike Ave Ste 200  
Erlanger, KY 41018-3147 USA

t 859 957 1570  
f 972 534 1526  
e america@ffeuk.com  
w www.ffeuk.com

Formerly known as Fire Fighting Enterprises Ltd

www.ffeuk.com