


Features

- Wide Band 138-960 MHz
- 2-, 3-, or 4-Way Divider
- Meets International Standards

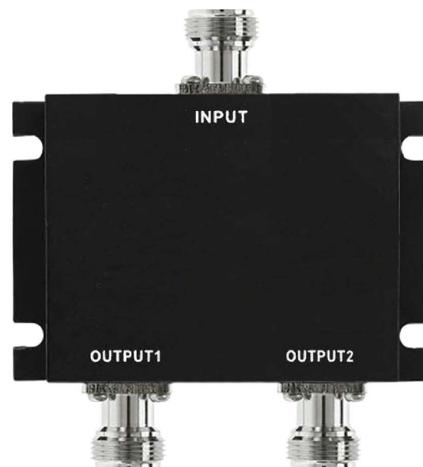

Description

These power dividers allow from 2 to 4 inside antennas to be used with a single amplifier. Each inside antenna connection has ≤ 1.8 dB signal loss. The full band dividers cover Public Safety bands from 138 MHz to 960 MHz.

These dividers transmit and receive signal and distribute equal amounts of signal sent to two to four interior antennas for similarly sized areas.

Technical Specifications

Item	2-Way Divider	3-Way Divider	4-Way Divider
Model No.	PD-138-960-2	PD-138-960-3	PD-138-960-4
Frequency Range	138-960MHz		
Insertion Loss	≤ 0.7 dB	≤ 1.6 dB	≤ 1.8 dB
VSWR	≤ 1.30		
Impedance	50 Ω		
Total Input Power (W)	80W		
Dimensions (With Connector)	6.26 x 6.26 inch	7.68 x 4.8 inch	7.68 x 4.8 inch

Ordering Information

Model	Description	Stock No.
PD-138-960-2	Equal Power Divider, 2-Way, 138-960MHz	3996195
PD-138-960-3	Equal Power Divider, 3-Way, 138-960MHz	3996194
PD-138-960-4	Equal Power Divider, 4-Way, 138-960MHz	3996193