


Activating the Active System Component Fail alarm on the GuardianB

Step 1– Power down the BDA

Step 2 – Remove cable shown here from both the “To RF” port and the RF Board (not shown)

Step 3 – Replace that cable with the new Test Cable provided

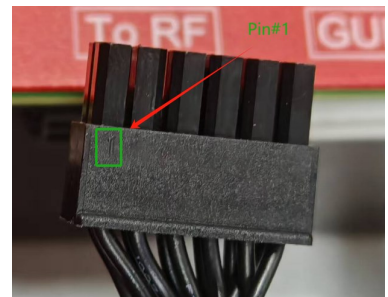

Step 4 – Power on BDA. System component alarm should trigger within 3-5 minutes

Step 5 – Once the alarm triggers, turn the BDA off

Step 6 – Disconnect the Test Cable and replace it with the original cable

Step 7 – Power on BDA. System Component Alarm should return to normal state