

UL Listed: For use with the PFC-4410RC Series
Dimensions: 2 1/4" x 3 1/2" x 3"
Weight: .315 lb.
Assembly: Socketed relay in plastic mounting track
Power Requirements: 40mA at 24VDC
Contact Ratings:
 Each relay has DPDT contacts,
 Rated at 10 amps resistive,
 120/240VAC, 0-30VDC



Stock number: 3004725

The ARM-2 Auxiliary Relay Module is a UL listed option when factory installed in the Potter PFC-4410RC Series.
 When the ARM-2 is used the additional power required for this relay module must be subtracted from the total circuit current available. See PFC-4410RC Manual #5403550. The ARM-2 Auxiliary Relay Module is a non-supervised DPDT Relay designed to be activated

by 24VDC Indicating and/or Releasing, polarity reversing circuits. The module can be used for fan shutdown, door release, elevator recall, etc.


Note: One to four ARM-2 modules in the PFC-4410RC series may be utilized to provide multiple auxiliary functions.

Wiring

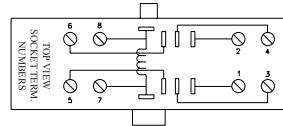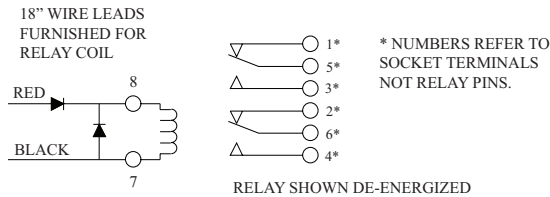


DWG# 977-1

Placement In PFC-4410RC Series Control Unit

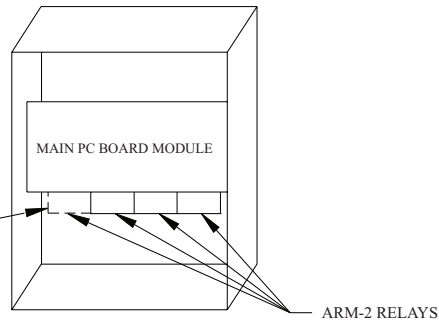

ARM-2/PFC-4410RC Installation Hook-Up Diagram

All relays shown in non-activated condition

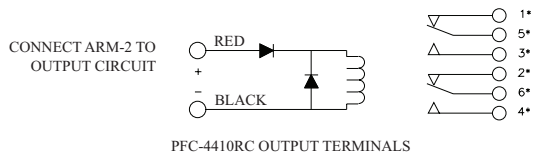

DWG# 977-2

Notes:

- * Numbers refer to socket terminals not relay pins.
- Auxiliary relay operation is determined by programming of the PFC-4410RC Series panel. Consult the appropriate manual for further information.