

Features

- Extends output voltage to 70VRMS on dual channel amplifiers
- Mounts in the DCA-5025 and DCA-10025 enclosure
- Equipped with a stacker bracket for secure mounting




Description

The 70V-1000 module extends the output voltage to 70V on the DCA-5025 and DCA-10025. The 70V-1000 is equipped with a stacker bracket for secure mounting.

Technical Specifications


Standby Current	2 mA
Alarm Current	562 mA
Operating Temperature	0°C-49°C (32°F-120°F)
Operating Humidity Range	10%-93% @ 30°C (86°F) noncondensing humidity





Installation

The 70V-1000 is connected to the DCA-5025 and DCA-10025 using a eight (8) pin ribbon cable. The connection is supervised, and power limited. The 70V-1000 must be mounted in the DCA enclosure. The module is equipped with a bracket for secure and accessible mounting.

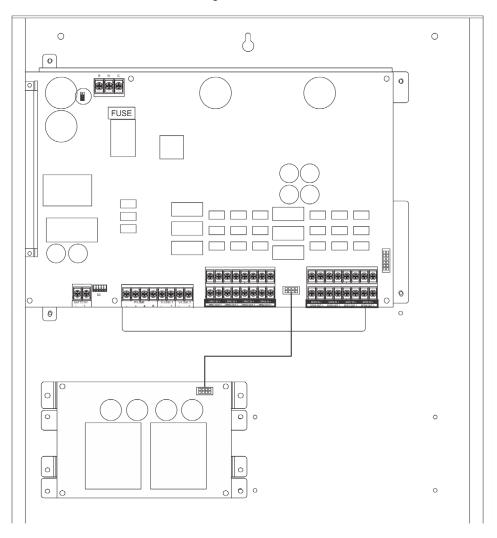

Ordering Information

Model	Description	Stock No.
70V-1000	70V-1000 70V EXTENDER FOR DCA AMPLIFIERS W/STACKER BRACKET	3520658

Potter Electric Signal Company, LLC • St. Louis, MO • Phone: 800-325-3936 • www.pottersignal.com