

Features

Display & Interface

- 7" Graphical Touchscreen Annunciator
- Black and red cabinet and trim ring options
- Flush mount
 - Surface mount available using optional trim ring
- Cabinet capable of mounting one network card
 - NCE-1000 or NCF-1000
- Clean aesthetic with high resolution display
- Ethernet interface from panel or network card to GTSA-7
- 24VDC Constant power input
- Color coded, prioritized & scrollable signals list
 - View multiple events simultaneously
- Ack, Silence, Reset, Enable/Disable Zone, Drill, Activate Input
- Pre-release, Release indicators
- Programmable Soft Keys – 1,000 buttons with user defined order
 - Disable Inputs, Disable Outputs, Disable Inputs & Outputs
- Network command and control
- Import custom logo image
- Program and firmware update with Potter Fire Panel Programmer
- Screen cleaning feature Locks screen for 10 seconds to allow for screen to be cleaned
- Multiple language options – English, Arabic, Hebrew, Portuguese, Spanish
- Compatible with IPA & AFC panels, ARC-100, and PFC-4064
- Warranty – 3 Years



Note: For a complete GTSA-7 remote annunciator both the GTSA-7 tablet (part number 3006790) and the GTSA-7CAB-B or GTSA-7CAB-R (part number 3992692 or 3992693) must be ordered

NYC Fire Dept.
 Certificate of Approval
 2025-TMCOAP-007763-CERT



Description

Introducing Potter's innovative GTSA-7 Fire Alarm Graphic Touchscreen Annunciator, designed to elevate safety and efficiency in fire detection systems. Packed with advanced features, the GTSA-7 is a significant advancement in the Potter product line. The integrated fire alarm touchscreen annunciator offers versatile control and is programmed using the same Potter Fire Panel Programmer software used on Potter fire alarm control panels. Featuring 1,000 programmable soft keys, the GTSA-7 enables efficient panel control. The feature set exceeds requirements for post-incident analysis. Flexible architecture allows direct connection to the panel or remote display options.


Connectivity between the GTSA-7 and a fire alarm control panel within the same room does not require an NCE-1000 or NCF-1000 network card. Network cards are required when the GTSA-7 and the fire alarm control panel are in separate rooms. The GTSA-7 is a network node with the same network configuration parameters as a multiple-panel network. Please refer to the NCE-1000 or NCF-1000 manuals for technical specifications and additional information when selecting and configuring the GTSA-7 using network cards.

The GTSA-7 requires that both GTSA-7 (3006790) and the GTSA-7CAB-B or GTSA-7CAB-R (3992692 or 3992693) be ordered for a complete touchscreen annunciator. The GTSA-7TR-B or GTSA-7TR-R (3002146 and 3002147), are optional trim rings for surface mount applications.


Technical Specifications





Overall size w/ bezel	11.58" W x 7.95" H x 3.20" D
Display	7" 1024 x 600 (HD) Capacitive multi-touch
Processor, Memory, Storage	1.6GHz 64-bit Quad Core, 2GB memory, 16GB storage
Primary Power	24VDC
Standby & Alarm Current	150mA @ 24VDC
Mounting	Flush and Surface mount
Cabinet	16 gauge cold rolled steel Door with lock and tinted Lexan window
Temperature Range	32° to 120° (0°C to 49°C)
Humidity Range	10% to 93% (Non-condensing)
Potter Panel Compatibility	IPA-4000(VE), IPA-100, IPA-60, AFC-1000(VE), AFC-100, AFC-50, ARC-100, PFC-4064
Agency	ANSI/UL 864, CSFM, FDNY

Peer-Peer Network

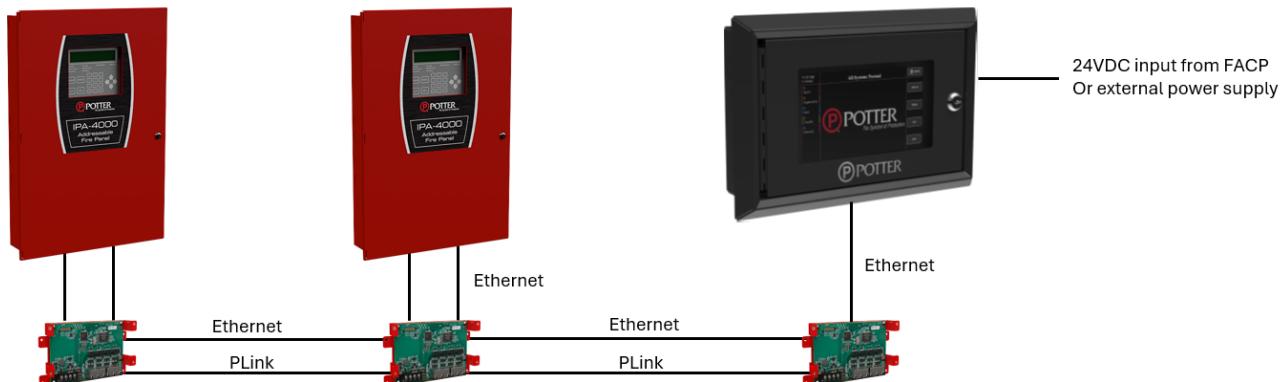

Same Room Direct Connect

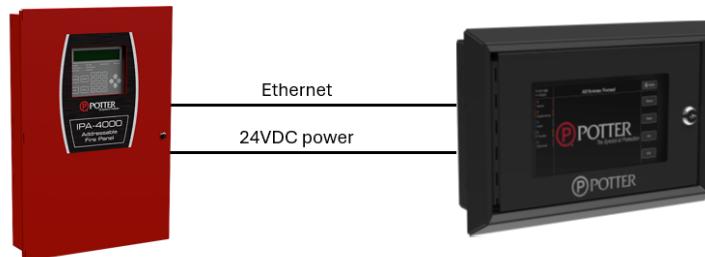

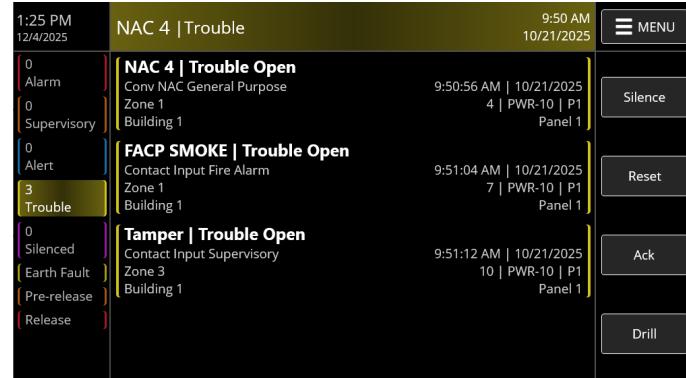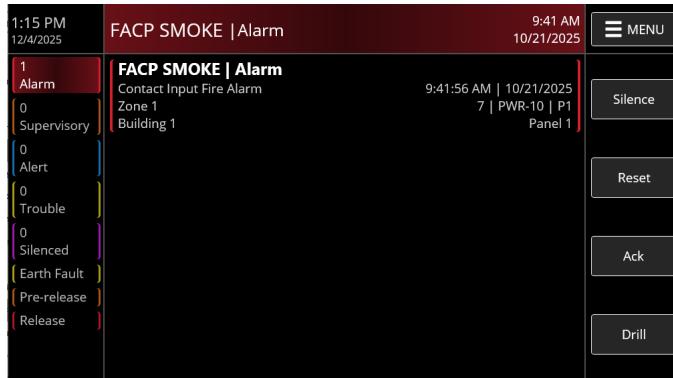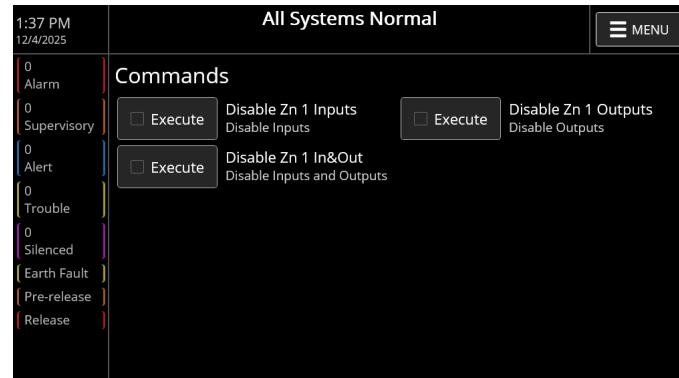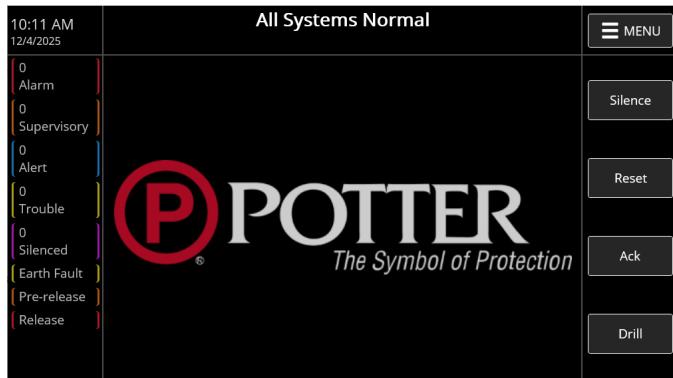

Ordering Information

Model	Description	Stock No.
GTSA-7	7" tablet assembly. Comes with bracket, mounting screws, Ethernet cable for network card to tablet connection, and ground wire.	3006790
GTSA-7CAB-B	Black GTSA-7 cabinet (flush or surface mount). Includes backbox, bezel/door/lock pre-assembled with tinted window and hardware	3992692
GTSA-7CAB-R	Red GTSA-7 cabinet (flush or surface mount). Includes backbox, bezel/door/lock pre-assembled with tinted window and hardware	3992693
GTSA-7TR-B	Black GTSA-7 trim ring for Surface Mount applications	3002146
GTSA-7TR-R	Red GTSA-7 trim ring for Surface Mount Applications	3002147

For a complete GTSA-7, the GTSA-7 and GTSA-7CAB-B or GTSA-7CAB-R must be ordered.

The GTSA-7TR-B and GTSA-7TR-R are optional trim rings when the GTSA-7 is used for surface mount applications.