


Features

- The CIM-16 offers 16 programmable normally open dry contacts.
- Compatible with EVAX-X70 voice panel
- Functions: Message Activation, Disable Inputs and Outputs, Auxiliary Input Trigger

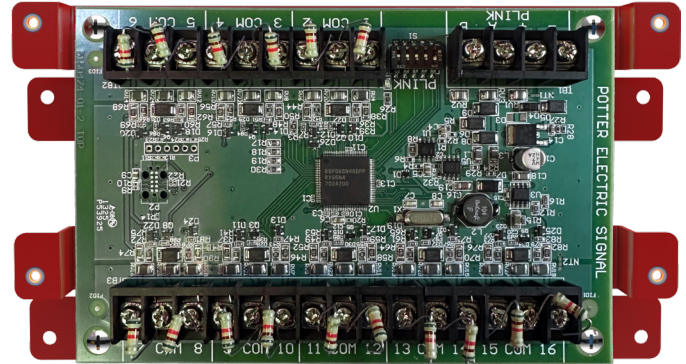

Description

The CIM-16 input module provides 16 inputs which are activated via normally open dry contacts. A contact closure between the selected input point and common will activate the input. The CIM-16 communicates through the P-Link communication bus. The inputs are power limited and supervised. Each card is mounted to the exclusive Stacker Bracket for secure and accessible mounting.

Technical Specifications

CIM-16	Specifications
Standby Current	23mA
Alarm Current	23mA
Operating Temperature Range	32° to 120°F (0° to 49°)
Operating Humidity Range	Up to 93% (non-condensing)

Installation

The CIM-16 input module provides 16 inputs which are activated via normally open dry contacts. A contact closure between the selected input point and common will activate the input. The CIM-16 communicates through the P-Link communication bus. The inputs are power limited and supervised. Each card is mounted to the exclusive Stacker Bracket for secure and accessible mounting.

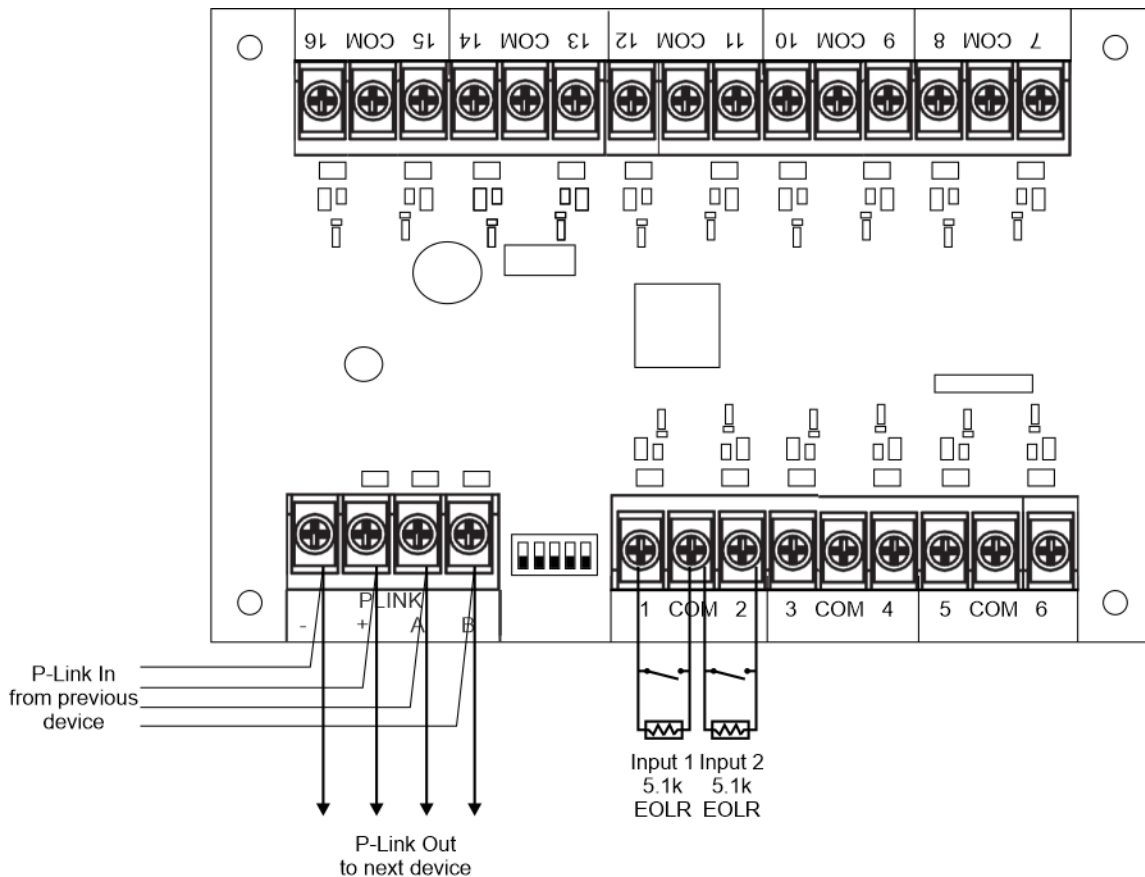


Figure 1 - CIM-16 Connections

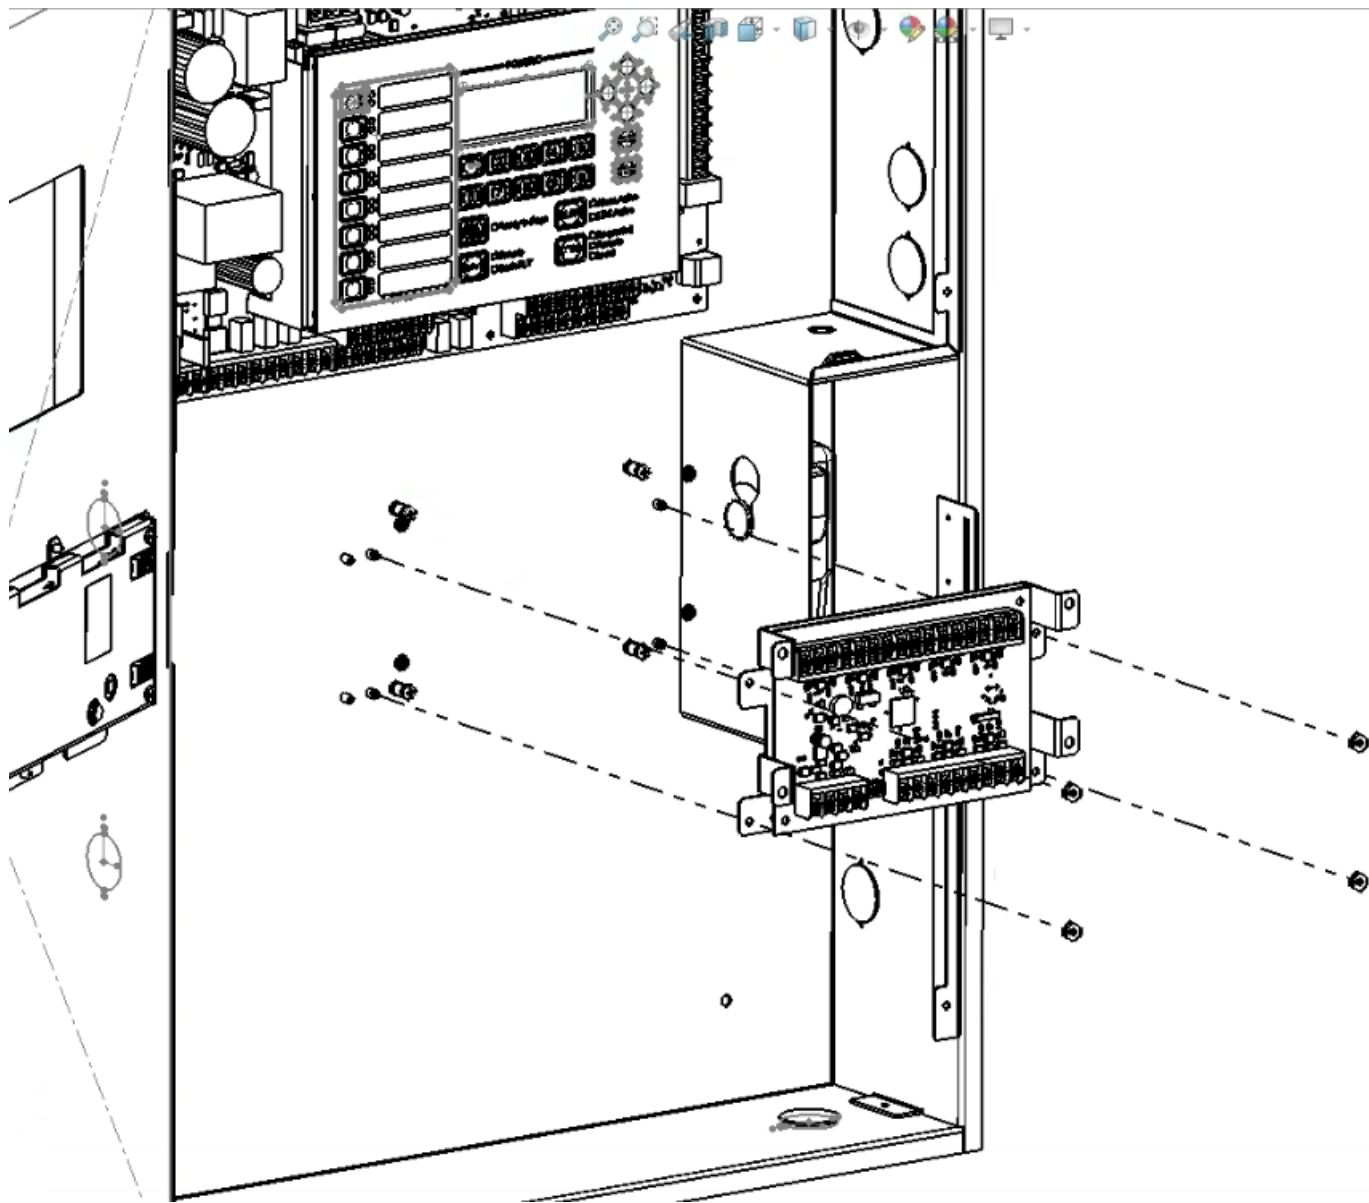


Figure 2 - CIM-16 Mounted in Back Box

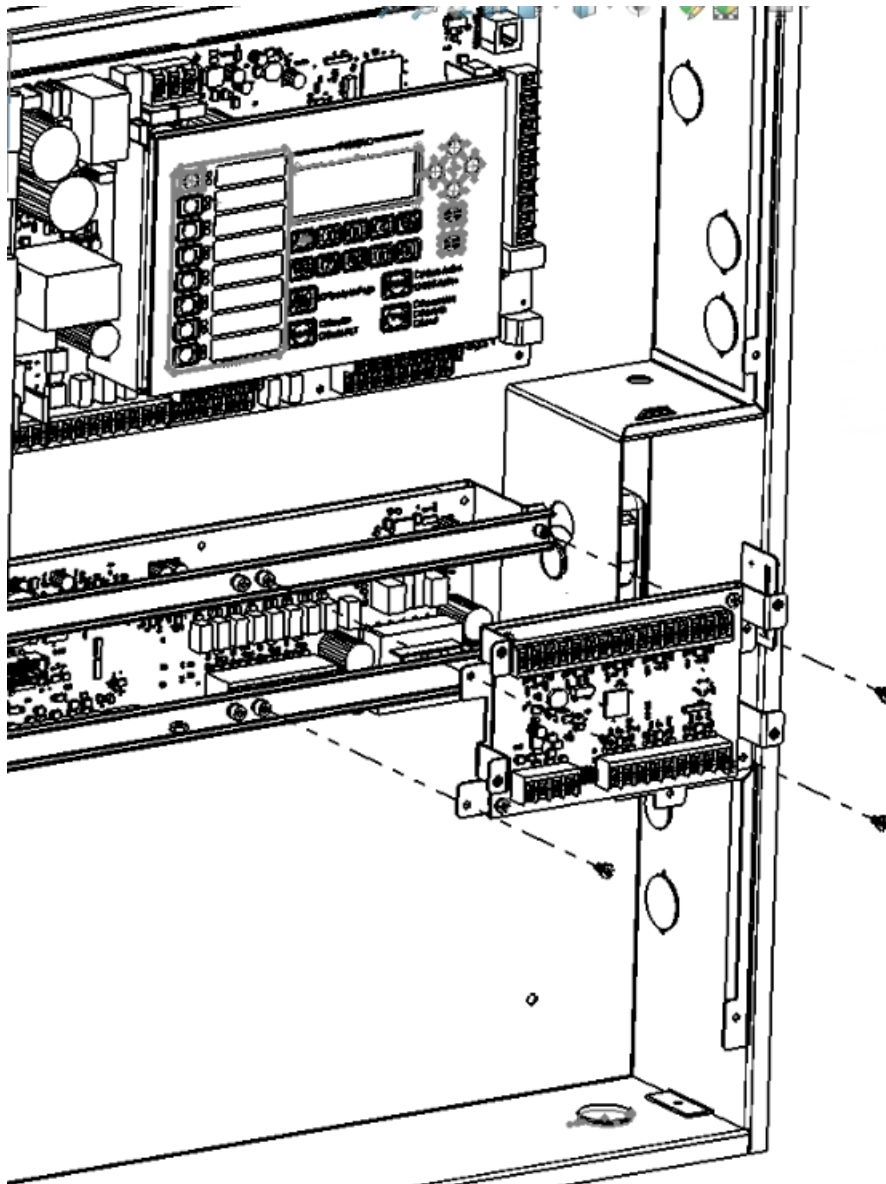


Figure 3 - CIM-16 Mounted on Stacker Bracket

Ordering Information

Model	Description	Stock No.
CIM-16	CIM-16 CONTACT INPUT MODULE	3520684