


FHS SERIES FLAT TRUMPET SPEAKER





- Wide frequency response range
- 15 watt power rating
- Wall and ceiling mount models
- Impact resistant housing
- Low profile design
- Patented design
- Bi-directional mounting bracket
- Water-proof housing
- Designer white housing
- FHS-2: 3.34"(W) x 3.34"(L) x 2.16"(D)
- FHS-3: 3.56"(W) x 3.56"(L) x 2.25"(D)

The FHS-2 speakers are specially designed to create more sound pressure for further distance. Compared to traditional cone speakers, the sound chamber is reduced and utilizes a unique reverse trumpet technology to generate the loudest sound blast. It is featured with a reversible mounting bracket and designed for outdoor applications. The compact design allows for discrete indoor wall mounting as well as sturdy construction for outdoor installation. Ideal for residential, commercial, and marine applications.

New Concept

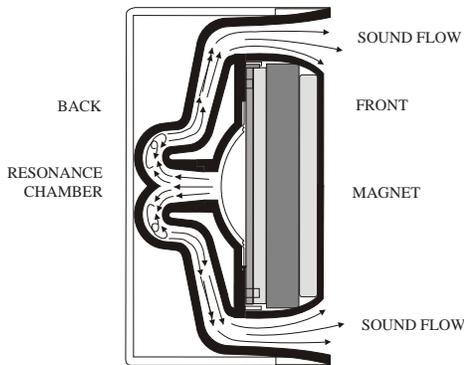

Installation

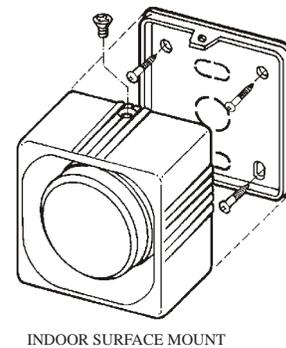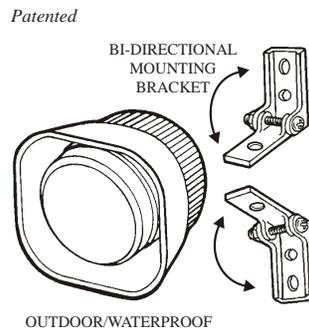

Specifications

Model Number	Impedance (Ohms)	Peak Power (Watts)	Frequency Response (Hz)	Sound Pressure Level (dBA/W,m)	Installation Type	Housing Color	Operating Temperature Range
FHS-2	8	20	0-7200	120	Outdoor	White	14°F - 122°F
FHS-3	8	20	0-7200	120	Indoor	White	-10°C - 50°C