


PSW SERIES PLUNGER SWITCH

PSW-1


The PSW-1 is a SPST N.O. Plunger Switch for closed circuit loop. The plungers 7mm overall stroke allows for only 3mm operating stroke. This device can be utilized as a tamper switch. It comes with #22 lead wires that are 25" long.

PSW-1H -adapter housing for PSW-1

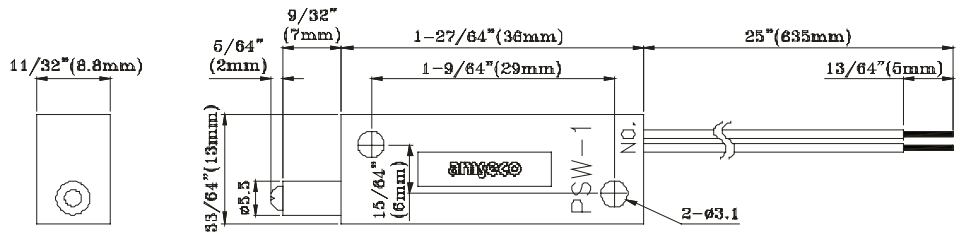


PSW-2

The PSW-2 normally closed and normally open SPST dual switches allow the PSW-2 to be used as SPDT transfer circuit. The plunger has a 7mm overall stroke and the lead wires are #22 and 25" long.

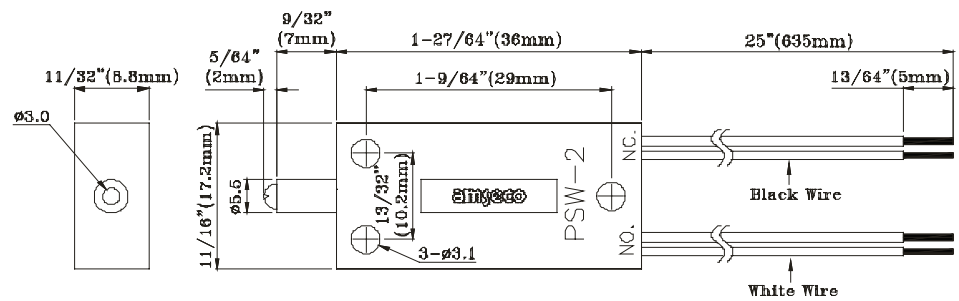


PSW-21

The PSW-21 is a SPST plunger switch for a closed circuit loop. It will fit into a 3/8" drilled hole for recessed mounting. The lead wires are #22 and 25" long.

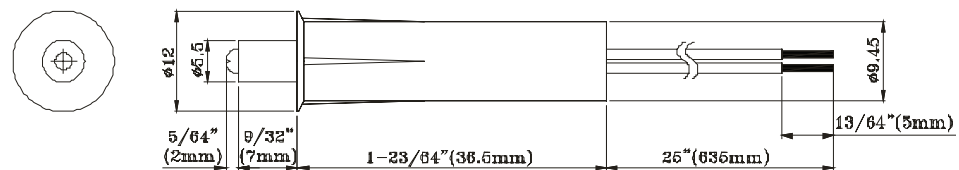

PSW-22

The PSW-22 is a SPST N.O. type for a closed circuit system. It will fit into a 3/8" drilled hole for recessed mounting. The lead wires are #22 and 25" long.

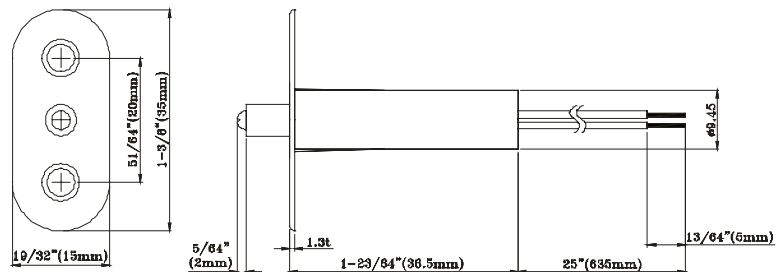

| Model Number | Color | Stock Number | Contact | Contact Rating | Contact Type | Max. Carry Current | Max. Switching Current | Breakdown Voltage | Operating Force |
|--------------|-------|--------------|--------------------|----------------|------------------|--------------------|------------------------|-------------------|-----------------|
| PSW-1 | Ivory | 4360006 | 22 AWG 25" lead | 10VA | Form A N.O. | 1 Amp | .3 Amp | 200 VDC | 100-200g |
| PSW-2 | Brown | 4360007 | | | Form C N.O./N.C. | | | | |
| | Gray | 4360008 | | | | | | | |
| PSW-21 | Ivory | 4360009 | | | Form A N.O. | | | | |
| | Brown | 4360010 | | | | | | | |
| PSW-22 | Gray | 4360011 | | | Form A N.O. | | | | |
| | Ivory | 4360012 | | | | | | | |
| PSW-22 | Ivory | 4360013 | Form A N.O. | | | | | | |