



PANEL INPUTS (INITIATING ZONES)
CONNECT TO NORMALLY OPEN DEVICES OR COMPATIBLE 2 WIRE SMOKE DETECTORS.
MAXIMUM LINE RESISTANCE: 100 OHMS (EXCEPT WITH LINEAR HEAT DETECTION)

OPTIONAL CA2Z MOUNTING LOCATION
ZONE 5 AND 6 ONLY



CA2Z WILL CONVERT ZONES 5 AND 6 CLASS B ZONES INTO CLASS A ZONES

OPTIONAL CLASS A CONNECTIONS EOLR IS NOT USED FOR CLASS A

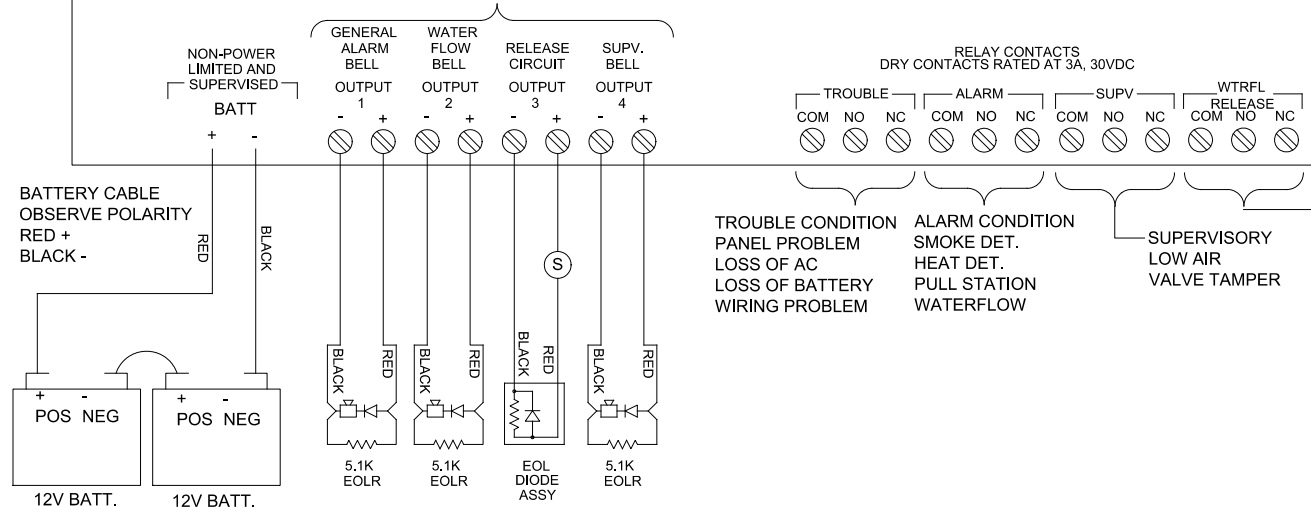

DWG# 3550-1